


# DTEN D7 55"

## All-in-One Video Conferencing and Collaboration Solution

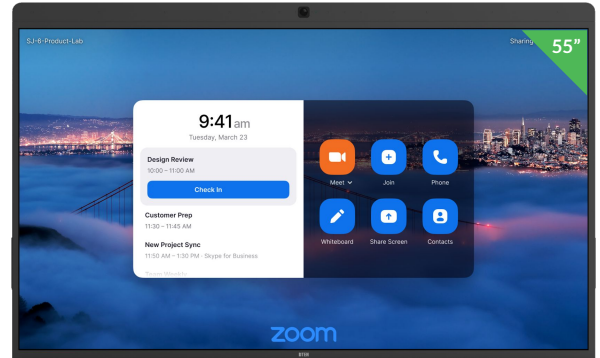


### SPECIFICATIONS

Software	Windows IoT
All-in-One	Multi-Touch Display 4K Camera 16-Microphone Array Integrated Speakers
Display	Ultra HD 4K LED 55" / 16:9 Capacitive Touch Screen Display
Camera System	4K / Fixed Lens, Infinite Focus / F-value: 2.8 Diagonal Field of View (FOV): Up to 120 Degrees
Audio System	16-Microphone Array Integrated Stereo Speakers Acoustic Echo Cancellation / Automatic Gain Control (AGC) / Automatic Noise Reduction
Network	Ethernet (RJ-45) 100/1000 Mbps Wi-Fi 802.11a/b/g/n, 802.11ac (2.4 and 5 GHz) IPv4 Dynamic Host Configuration Protocol (DHCP)/ Static HTTP Proxy Support
Inputs & Outputs	HDMI Out x 1 / HDMI In x 1 USB 3.0 x 2 3.5-mm Audio Jack x 1 / Microphone x 1 Ethernet LAN (RJ45) x 1
VESA	400 x 300 mm
Power	100 to 240 V AC, 50 to 60 Hz
Product Dimensions	49 x 30.5 x 2.13 in (124.5 x 77.4 x 5.4 cm)
Product Weight	50.7 lb (23 kg)
Packaging Dimensions	56 x 36 x 8.5 in (142 x 92 x 21.5 cm) / With an outer box
Packaging Weight	60 lb (35 kg)
Operating Temperature and Humidity	Operating Temperature 0°C to 40°C Storage Temperature -10°C to 60°C Operating Humidity 20% to 80% RH Storage Humidity 10% to 60% RH

# DTEN D7 75"

## All-in-One Video Conferencing and Collaboration Solution

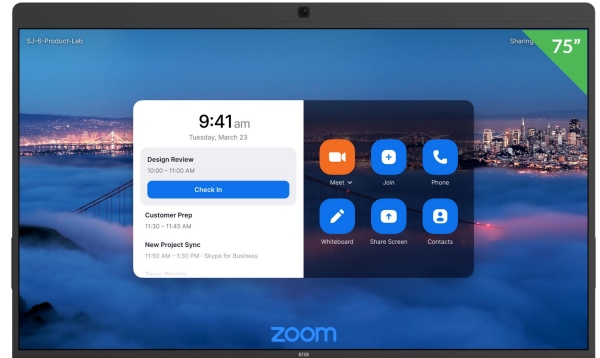

### SPECIFICATIONS

Software	Windows IoT
All-in-One	Multi-Touch Display 4K Camera 16-Microphone Array Integrated Speakers
Display	Ultra HD 4K LED 75" / 16:9 Capacitive Touch Screen Display
Camera System	4K / Fixed Lens, Infinite Focus / F-value: 2.8 Diagonal Field of View (FOV): Up to 120 Degrees
Audio System	16-Microphone Array Integrated Stereo Speakers Acoustic Echo Cancellation / Automatic Gain Control (AGC) / Automatic Noise Reduction
Network	Ethernet (RJ-45) 100/1000 Mbps Wi-Fi 802.11a/b/g/n, 802.11ac (2.4 and 5 GHz) IPv4 Dynamic Host Configuration Protocol (DHCP)/ Static HTTP Proxy Support
Inputs & Outputs	HDMI Out x 1 / HDMI In x 1 USB 3.0 x 2 3.5-mm Audio Jack x 1 / Microphone x 1 Ethernet LAN (RJ45) x 1
VESA	800 x 400 mm
Power	100 to 240 V AC, 50 to 60 Hz
Product Dimensions	66.1 x 37.9 x 2.19 in (167.87 x 96.29 x 5.54 cm)
Product Weight	83.6 lb (38 kg)
Packaging Dimensions	73.4 x 44.7 x 7.7 in (186.5 x 113.5 x 19.5 cm)
Packaging Weight	94.6 lb (43 kg)
Operating Temperature and Humidity	Operating Temperature 0°C to 40°C Storage Temperature -10°C to 60°C Operating Humidity 20% to 80% RH Storage Humidity 10% to 60% RH